
mara deluxe washlounge

#1412

MARA DELUXE



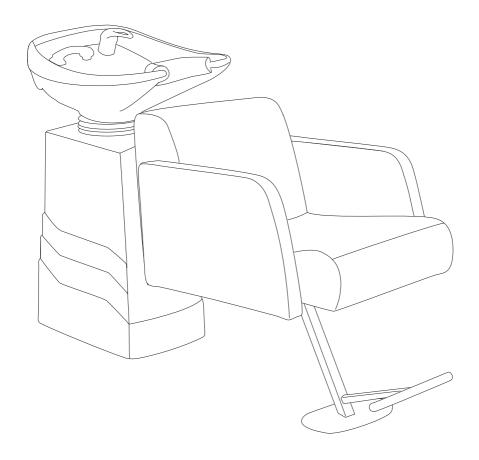

IMPORTANT PLEASE READ THESE SAFETY INSTUCTIONS

GENERAL SAFETY

- Read carefully and keep these instructions in a safe place.
- Use this product only for its intended function and do not use attachments not recommended by the manufacturer.
- 3. Do not use outdoors.

PLUMBING

1. This unit must be installed by a licensed plumber.

♠ IMPORTANT


ALL PLUMBING MUST BE COMPLETED BY A LICENSED PLUMBER

A

IMPORTANT

DO NOT ALLOW CHILDREN AROUND THE WASHLOUNGE WHEN IN USE

FUNCTIONS

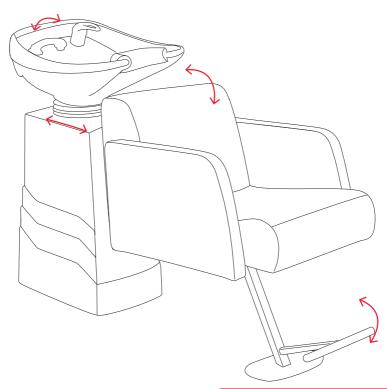

FUNCTIONS

- Sit in chair and lay back, the back rest will recline with body weight.
- Use flick-down footrest, and stow in up position when not in use.



FOR BEST SUPPORT PLEASE ADVISE CLIENT TO SIT WELL BACK INTO THE SEAT.

GET STARTED


MARA DELUXE


Reclining backrest washlounge with footrest. Optional basin colour of black or white.


Width: 600mm


Length: 1350mm-1460mm **Basin Height:** 900mm












ASSEMBLY

No.	Part List	Q'ty
A		1
В		1
С		1
D		1


No.	Part List	Q'ty
E	Ç um	8
F	5	4
G	0	12
Н	0=	1
ı	0=	1
J		2
K		1
L	2=	1

STEP 1

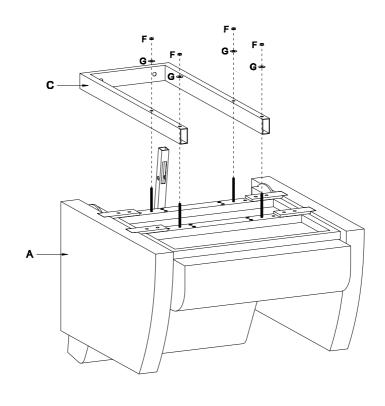


ASSEMBLY


STEP 2

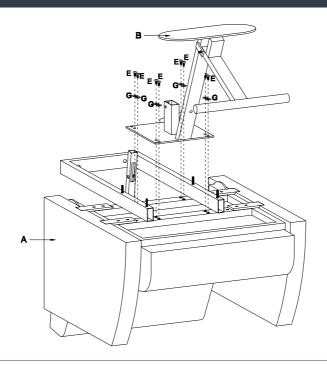


STEP 3



POSITIONING: BASIN STAND OPTION

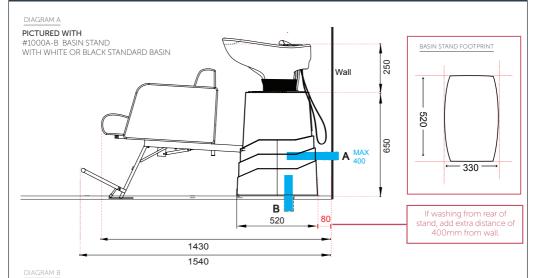

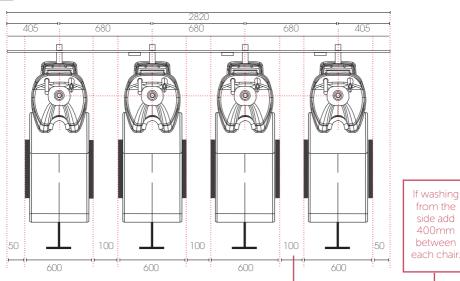

PLUMBING ACCESS OPTIONS

Determine the best way to connect plumbing for your washlounge.

OPTION 1: PLUMBING

From behind the basin stand connect plumbing to the wall. From the back of the stand, plumbing can be installed from a maximum height of 400mm from the floor. OPTION 2: PLUMBING


From under the basin stand connect plumbing to the floor.



IMPORTANT

ALL PLUMBING MUST BE COMPLETED
BY A LICENSED PLUMBER

INSTALLATION & ASSEMBLY: BASIN STAND WITH STANDARD BASIN OPTION

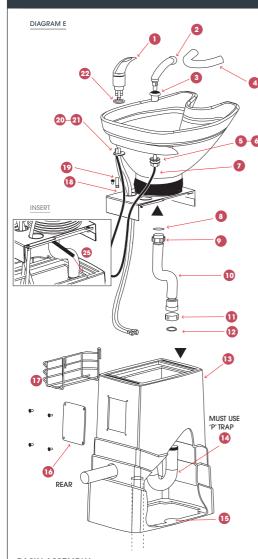

BASIN ASSEMBLY

- 1 Flick Mixer
- 2 Showerhead
- 3 Showerhose basin collar
- 4 Comfortneck
- 5 Foam washers
- 6 Plastic nut
- 7 Showerhose
- 8 Flat seal
- 9 Fitted flange
- 10 Flexible waste pipe
- 11 Flange
- 12 Seal

- 13 Stand
- 14 P trap (not supplied)
- **15** Middle lugs
- 16 Rear Access Panel
- 17 Shampoo tray (optional extra)
- 18 Vinyl strap
- 19 Long nut
- 20 Plastic washers
- 21 Metal washers
- **22** O-ring
- 23 Basin Spring

COMFORTEL PRODUCT

#1000A-B BASIN STAND WITH WHITE/BLACK STANDARD BASIN

BEFORE INSTALLING YOU SHOULD CONSIDER THE FOLLOWING:

Allow for the necessary room around the unit for free movement

- If installing against a wall, a minimum distance of 80mm between wall and bottom back of stand is required to allow free backward movement of basin.
- If plumbing location is in wall (see Diagram A), drill a hole in rear wall of stand. For neatness of finish it is preferable to bring water and waste into the stand in the same hole.
- If plumbing location is on floor (see Diagram A), place stand over.

STAND ASSEMBLY

- Position stand as required. If plumbing location is in wall drill hole in rear of stand; if plumbing location is on the floor place stand over. (P trap not supplied).
- Basin stand MUST be secured to the floor. Use middle lugs (Fasteners not supplied). Rear Access Panel may be removed to facilitate access.

BASIN ASSEMBLY

- Install Flick Mixer using O-ring, plastic and metal washers & (Long Nut) and Shower Head using the Showerhose Basin Collar, O-ring, Foam Washer & Plastic Nut as indicated.
- 4. Place Flick Mixer and Shower Head Hoses through the holes in the Vinyl Strap.
- Connect Flexible Waste Pipe to Plug and Waste which is already installed making use of the with Flat Seal and fitted Flange.

STAND-BASIN ASSEMBLY PLUMBING CONNECTION

- 6. Connect Flexible Waste Pipe to P trap (not supplied) making use of Seal and Flange.
- 7. Using four screws found on top of Stand, fix assembled Basin to stand making use of holes at end of rail channels.
- 8. Connect hot and cold (1/2" connection) water braided hoses to respective supplies.
- Connect Basin Spring which is already connected to the tilt and slide plate to the hole in the stand at the top left corner. (See insert)
- 10. Place both ends of Vinyl Cover into the slots provided on front and back of Stand.
- 11. Please attach Comfortneck to the basin.
- 12. Fit Shampoo Tray (optional extra) to the side of your choice.

POSITIONING: BASIN STAND II WITH XL BASIN OPTION


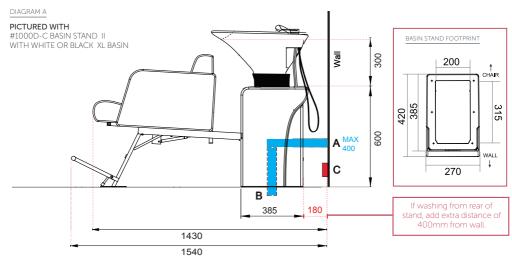


DIAGRAM F

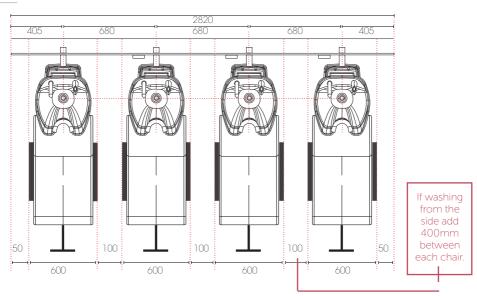

PLUMBING ACCESS OPTIONS

Determine the best way to connect plumbing for your washlounge.

OPTION 1: PLUMBING

From behind the basin stand connect plumbing to the wall. From the back of the stand, plumbing can be installed from a maximum height of 400mm from the floor.

OPTION 2: PLUMBING


From under the basin stand connect plumbing to the floor.



IMPORTANT

ALL PLUMBING MUST BE COMPLETED BY A LICENSED PLUMBER

INSTALLATION & ASSEMBLY: BASIN STAND WITH STANDARD BASIN OPTION

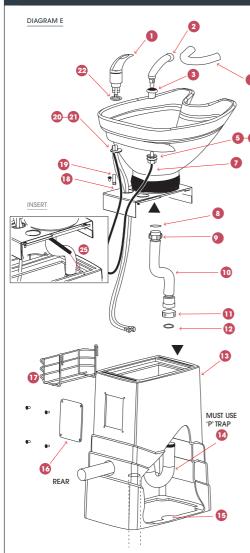

BASIN ASSEMBLY

- 1 Flick Mixer
- Showerhead
- 3 Showerhose basin collar
- Comfortneck
- 5 Foam washers
- Plastic nut
- Showerhose 8
- Flat seal Fitted flange
- 10 Flexible waste pipe
- 11 Flange
- 12 Seal

Stand 13

- 14 P trap (not supplied)
- 15 Middle luas
- 16 Rear Access Panel
- 17 Shampoo trav (optional extra)
- 18 Vinyl strap
- 19 Long nut
- 20 Plastic washers
- 21 Metal washers
- **22** O-ring
- 23 Basin Spring

COMFORTEL PRODUCT

#1000A-B BASIN STAND WITH WHITE OR BLACK STANDARD BASIN

BEFORE INSTALLING YOU SHOULD CONSIDER THE FOLLOWING:

Allow for the necessary room around the unit for free movement.

- · If installing against a wall, a minimum distance of 80mm between wall and bottom back of stand is required to allow free backward movement of basin
- If plumbing location is in wall (see Diagram A), drill a hole in rear wall of stand. For neatness of finish it is preferable to bring water and waste into the stand in the same hole.
- If plumbing location is on floor (see Diagram A), place stand over.

STAND ASSEMBLY

- 1. Position stand as required. If plumbing location is in wall drill hole in rear of stand; if plumbing location is on the floor place stand over. (P trap not supplied).
- 2. Basin stand MUST be secured to the floor. Use middle lugs (Fasteners not supplied). Rear Access Panel may be removed to facilitate access.

BASIN ASSEMBLY

- 3. Install Flick Mixer using O-ring, plastic and metal washers & (Long Nut) and Shower Head using the Showerhose Basin Collar, O-ring, Foam Washer & Plastic Nut as indicated.
- 4. Place Flick Mixer and Shower Head Hoses through the holes in the Vinyl Strap.
- 5. Connect Flexible Waste Pipe to Plug and Waste which is already installed making use of the with Flat Seal and fitted Flange.

STAND-BASIN ASSEMBLY PLUMBING CONNECTION

- 6. Connect Flexible Waste Pipe to P trap (not supplied) making use of Seal and Flange.
- 7. Using four screws found on top of Stand, fix assembled Basin to stand making use of holes at end of rail channels.
- 8. Connect hot and cold (1/2" connection) water braided hoses to respective supplies.
- 9. Connect Basin Spring which is already connected to the tilt and slide plate to the hole in the stand at the top left corner. (See insert)
- 10. Place both ends of Vinyl Cover into the slots provided on front and back of Stand.
- 11. Please attach Comfortneck to the basin.
- 12. Fit Shampoo Tray (optional extra) to the side of vour choice.


POSITIONING: BENCH KIT OPTION


WASHING FROM BEHIND BENCH CONFIGURATION

COMFORTEL PRODUCT REFERENCE

#1000E-F BENCH KIT WHITE OR BLACK BASIN #10020-21 BASIN BENCH DOUBLE X 2

DIAGRAM C DIAGRAM E

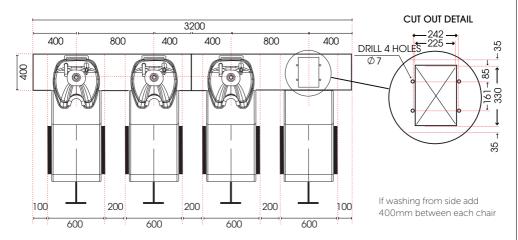

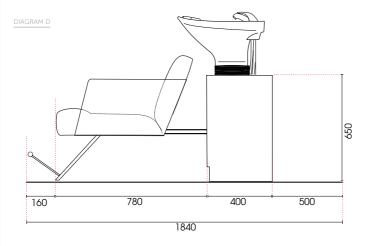


All measurements are in mm.

BASIN BENCH KIT

Choose this option if a bench kit is purchased. Basin Bench Kit is available in 2 position. For a 4 Position Bench, please see 4 Position Diagram, where 2 x Basin Bench Doubles are installed next to each other. Basin Bench Kit is recommended for situations requiring washing from behind when the plumbing is not through the floor.

For more information about the product go to www.comfortel.com.au.

INSTALLATION & ASSEMBLY: BASIN

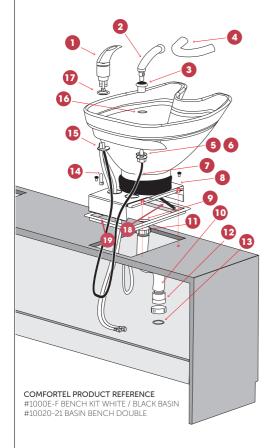

BENCH FIXING DETAIL

- Position Bench as required.
- 2. Bench must be secured to the floor, or wall. (Fasteners not provided)
- 3. Seal base seal the base of the bench inside and outside with silicone.

BASIN ASSEMBLY

- 4. Install Flick Mixer using the O-ring, plastic and metal washers & Long Nut, and Showerhead using the Showerhose Basin Collar, O-ring, Foam Washer and Plastic Nut as indicated.
- 5. Place Flick Mixer and Showerhead Hoses through the holes in the Vinyl Strap.
- 6. Connect Flexible Waste Pipe to Plug and Waste which is already installed making use of end with Flat Seal and fitted flange.

BENCH KIT ASSEMBLY

- 7. Connect hot and cold (1/2" connection) water braided hoses to respective supplies.
- 8. Connect Flexible Waste Pipe (supplied) to P Trap (not supplied) making use of Seal and Flange.
- 9. Connect Basin Spring which is already connected to the tilt and slide plate to the hole in the Bench Kit Frame at the front left corner.
- 10. Place both ends of Vinyl Cover into the slots provided on front and back of Bench Kit Frame.

BASIN ASSEMBLY

- 1 Flick Mixer
- 2 Showerhead
- 3 Showerhose Basin Collar 13 Seal
- 4 Comfortneck
- 5 Foam Washer
- 6 Plastic Nut
- **7** Showerhose
- 8 Vinyl Strap 9 Flat seal
- 10 Flexible Waste Pipe

- 11 Fitted flange
- 12 Flange
- 14 Long nut
- 15 Plastic & Metal Washers
- **16** O-ring
- **17** O-ring
- 18 Basin spring
- 19 Bench Kit Frame





A IMPORTANT


ALL PLUMBING MUST BE COMPLETED BY A LICENSED PLUMBER


POSITIONING: BUILDING YOUR OWN BENCH WITH XL BASIN

WASHING FROM BEHIND BENCH CONFIGURATION

COMFORTEL PRODUCT REFERENCE

#1000G-H BENCH KIT WHITE OR BLACK XL BASIN

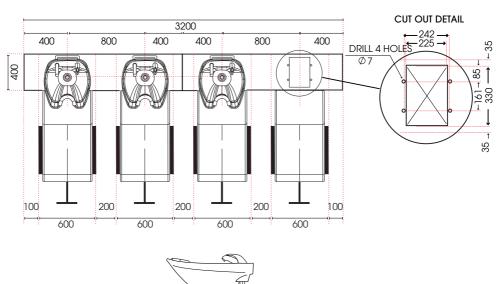




BENCH HEIGHT REQUIREMENTS:

XL Basin Bench Height: 600mm Standard Basin Bench Height: 650mm


INSTALLATION & ASSEMBLY: CHAIR TO BASIN STAND



INSTALL CHAIR TO BASIN STAND


• Fix Connector to stand front using two bolts and nuts provided.

INSTALLATION & ASSEMBLY: CHAIR TO BASIN BENCH



INSTALL CHAIR TO BASIN BENCH

- Fix Connector to Bench front using two bolts and nuts provided. Refer to sketch for drilling details.
- It is recommended to install these brackets before installing bench for easy access.



MAINTENANCE

A periodic inspection of all components and fasteners should be made to ensure that your Comfortel Product is structurally intact and functioning properly.

Damaged and broken parts should be replaced and loose fasteners tightened.

All maintenance to be carried out by a suitably qualified tradesperson.

HOW TO CHANGE A SHOWERHEAD

For more support & help,including troubleshooting videos, refer to our support center on our website

help.comfortel.com.au

CLEANING

UPHOLSTERY

All upholstery needs some care; good housekeeping will help to prolong the life of any upholstered products. Avoid extreme temperatures. Extreme cold can make your vinyl prone to cracking, while extreme heat can cause permanent stretching. Avoid exposing your products to direct sunlight for prolonged periods of time.

ALWAYS FOLLOW THE CLEANING INSTRUCTIONS

- Wipe with a clean colourfast cloth dampened with mild alkaline free soap and luke warm water. Do not wet excessively.
- Remove all traces of any cleaning product by wiping with fresh water and a clean cloth.
- Dry with a soft, clean cloth.
- · Stubborn grime may require gentle scrubbing with a soft brush.

Do not use:

- · hot or boiling water
- · hydrocarbons including alcohol
- acetone
- furniture polishes
- bleach
- · concentrated detergents
- · abrasive powder or paste cleaners
- steel wool
- silicon or petroleum-based cleaners
- · solvent based or abrasive cleaning agents

comfortel

help.comfortel.com.au

PRODUCT CODE

#1412 MARA DELUXE WASHLOUNGE

Revision Date: V4.06.04.2021

WARRANTY PERIOD

©Comfortel Furniture. All rights are reserved. No part of this document may be photocopied, reproduced or translated to another language without written consent of Comfortel Furniture Pty Ltd.

The information contained in this document is subject to change without notice and should not be construed as a commitment by Comfortel Furniture Pty Ltd.

Comfortel Furniture Pty Ltd. assumes no responsibility for any errors that may appear in this document nor does it make expressed or implied warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose.

Comfortel Furniture Pty Ltd. shall not be liable for incidental or consequential damages in connection with or arising out of the use of this document and the program material.

PLEASE RETAIN THIS INFORMATION FOR FUTURE REFERENCE

For more information about our products and services, contact us at comfortel.com.au $\,$

PURCHASE DATE	INVOICE NUMBER	
) ()